



Air Conditioning & Heating



## PRODUCT SPECIFICATIONS

### AEPF/AEPT SERIES

MULTI-POSITION,  
VARIABLE-SPEED  
AIR HANDLERS

1½ TO 5 TON



The Goodman® brand 2006 AEPF/AEPT Multi-Position, Variable-Speed Air Handlers are suitable for use with refrigerants R-410A and R-22. (Please note Nomenclature Chart on Page 2.) These units' blower design includes a variable-speed DC motor to help eliminate the cold blast of air upon heating start-up.

#### Standard Features

- Certain models are suitable for use with refrigerants R-410A and R-22 (see Nomenclature Chart on Page 2).
- Check flowrate expansion device for cooling and heat pump applications (AEPF)
- Check expansion valve for cooling and heat pump applications (AEPT)
- Variable-speed motor
- Provides constant CFM over a wide range of static pressure conditions independent of duct system; provides low CFM for efficient fan-only operation
- Up to 14 field-selectable airflow settings can be adjusted to optimize the system's CFM for each individual mode of operation
- Improved humidity control and comfort
- Compatible with heat pumps and variable-capacity cooling applications
- Multi-position—upflow, downflow or horizontal installations
- Built-in coil has horizontal, vertical, and downflow drain pans with secondary drain connections
- ARI Certified; ETL Certified

#### Cabinet Features

- Fully painted cabinet with attractive Architectural Gray finish
- Built-in filter rack for 1" filter (filter not included)
- Low-voltage cabinet connections; control circuit is arranged to permit staging
- Power supply on top; low-voltage entry on top or side
- Factory-sealed to achieve 2% or less leakage rate at 1.0" water gauge external duct static pressure


#### Accessories

- 3 kW to 21 kW electric heat kits available as field-installed options
- Permanent washable plastic air filters
- Coil Insulation Kits for downflow applications
- Horizontal drain pan insulation kits



# PRODUCT SPECIFICATIONS

## NOMENCLATURE

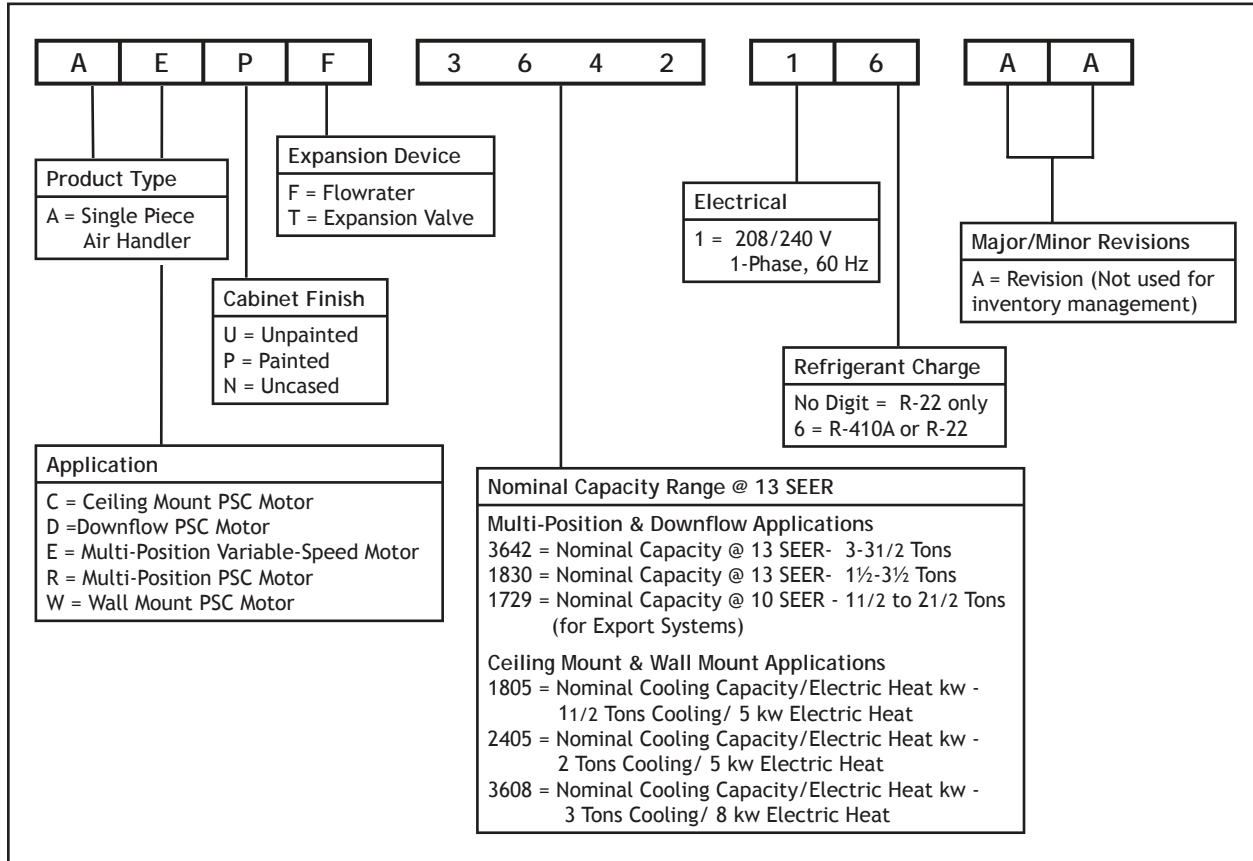


# PRODUCT SPECIFICATIONS

## SPECIFICATIONS

	AEPF1830 1/16	AEPF3036 1/16	AEPF4260 1/16	AEPT030 00C-1A	AEPT036 00C-1A	AEPT060 00C-1A
Specifications						
Blower						
Diameter	9½"	10⅝"	10⅝"	9½"	10⅝"	10⅝"
Width	8"	10⅝"	10⅝"	8"	10⅝"	10⅝"
Coil Drain Connection FPT	¾"	¾"	¾"	¾"	¾"	¾"
Service Valve						
Liquid	⅜"	⅜"	⅜"	⅜"	⅜"	⅜"
Suction	¾"	⅞"	⅞"	¾"	⅞"	⅞"
Electrical Data						
Voltage	208/240	208/240	208/240	208/240	208/240	208/240
Electric Heat Capacity (kW)	5, 8, 10	8, 10, 15	10, 15, 20, 21	5, 8, 10	8, 10, 15	10, 15, 20, 21
Min Circuit Ampacity	2.5	3.1	7.8	2.5/2.5	3.1/3.1	7.8/7.8
Max. Overcurrent Device (amps)	15	15	15	15/15	15/15	15/15
Minimum VAC	197	197	197	197	197	197
Maximum VAC	253	253	253	253	253	253
Blower Motor						
FLA	2.0	2.5	6.2	2	2.5	6.2
HP	½	¾	¾	½	¾	¾
Ship Weight (lbs)	147	176	195	147	176	195

# PRODUCT SPECIFICATIONS

## DIMENSIONS

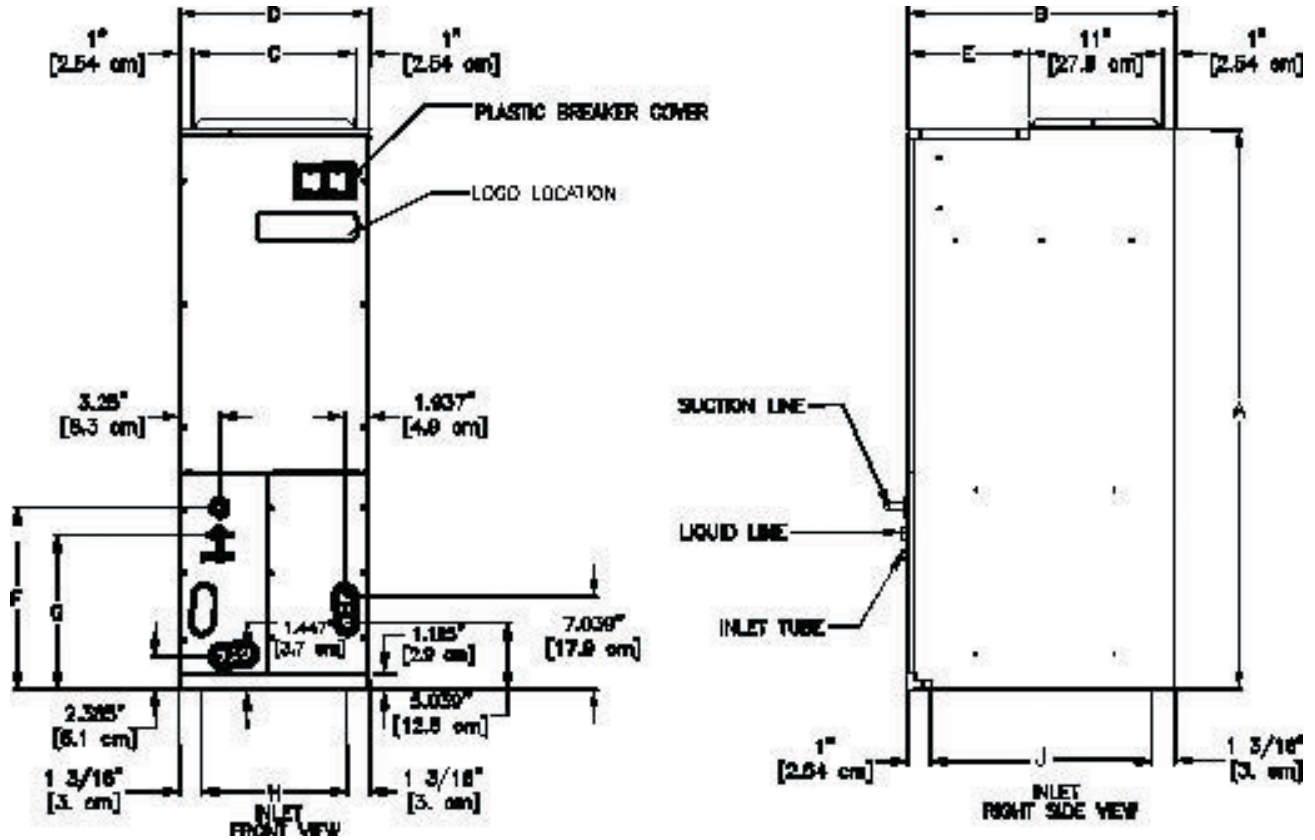


Model	A	B	C	D	E	F	G	H	I	J
AEPF18301/16	46¾"	22"	17½"	19½"	10"	14½"	11.935"	17⅞"	17.938"	2.024"
AEPF30361/16	53¼"	24"	20"	22"	12"	14½"	11.935"	19⅞"	17.938"	1.837"
AEPF42601/16	53¼"	24"	20"	22"	12"	14½"	11.935"	19⅞"	17.938"	1.837"
AEPT03000C-1A	46¾"	22"	17½"	19½"	10"	14½"	11.935"	17⅞"	17.938"	2.024"
AEPT03600C-1A	53¼"	24"	20"	22"	12"	14½"	11.935"	19⅞"	17.938"	1.837"
AEPT06000C-1A	53¼"	24"	20"	22"	12"	14½"	11.935"	19⅞"	17.938"	1.837"

## AEPF/AEPT DIPSWITCHES

The AEPF/AEPT air handler blower motors are pre-programmed for operation at four distinct airflow levels when operating in the Cooling, Heat Pump Heating, Backup Heating (Electric Heating), and Backup + Heat Pump Heating modes. Each mode has four levels to deliver different CFM. Simply flip the dipswitch and to get a different CFM combination.

### Setting Up Your Motor

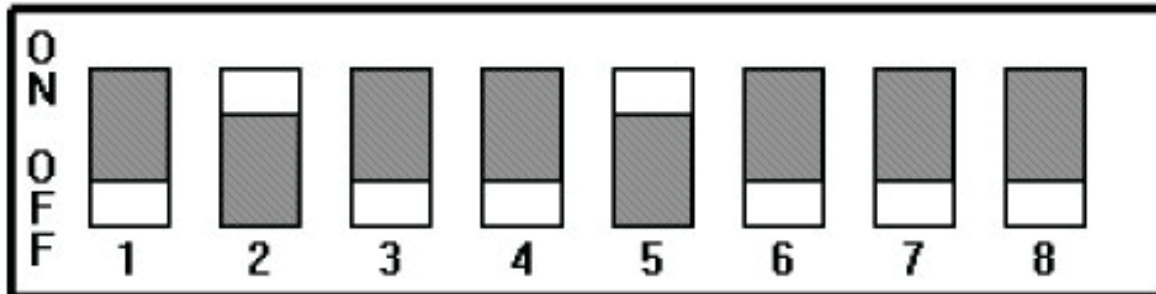

Dipswitch Number	Function	Instructions
1	Electric Heat Mode	Select the taps allowed in the tables (Dipswitch 1/2) below.
2	Electric Heat Mode	
3	N/A	
4	Thermostat Mode	ON = The system operates with single-stage units using a single-stage cooling or heat pump thermostat. (factory default) OFF = The system operates with two-stage units with either a conventional two-stage cooling/heat pump thermostat or with an encoded two-stage thermostat for cooling operation. The encoded thermostats can be used with two-stage condensing units in retrofit applications where not enough existing wires are available for connections to the indoor thermostat and outdoor units.
5	Cooling/Heat Pump Mode	Find the airflow for your application in the tables (Dipswitch 5/6) below.
6	Cooling/Heat Pump Mode	Set up the motor based on the outdoor unit capacity tons.
7	Trim CFM Adjust Mode	Increase or decrease your selected airflow to fit your requirement.
8	Trim CFM Adjust Mode	ON-OFF = Increases selected Cool/Heat Pump airflow by 10%. OFF-ON = Decreases selected Cool/Heat Pump airflow by 15% NOTE: Other settings have no effect on the set airflow.

#### Dipswitch 1/2

AEPF1830 & AEPT30

Heating Element (kW)	Switch Position	Emergency Backup	Heat Pump with Backup
Up to 10	On-On <sup>1</sup>	1,020	1,070
Up to 10	On-Off	850	935
5	Off-On	700	770

#### Dipswitch 5/6

AEPF1830 & AEPT30

Heating Element (kW)	Switch Position	Emergency Backup	Heat Pump with Backup
2.5	On-On <sup>1</sup>	1,020	1,020
2	On-Off	800	800
1.5	Off-On	600	600

AEPF3036/4260 & AEPT36/60

Heating Element (kW)	Switch Position	Emergency Backup	Heat Pump with Backup
Up to 20	Off-Off	2,050	2,150
Up to 20	On-Off	1,750	1,835
Up to 15	Off-On	1,600	1,680
Up to 10	On-On	1,200	1,260

AEPF3036/4260 & AEPT36/60

Heating Element (kW)	Switch Position	Emergency Backup	Heat Pump with Backup
5	Off-Off	1,800	1,800
4	On-Off	1,580	1,580
3.5	Off-On	1,480	1,480
3	On-On	1,200	1,200

<sup>1</sup> 7-8 shall be OFF-ON for 2.5-ton applications

NOTE: When applying a humidistat (normally closed), refer to the installation and operating instructions. The humidistat can adjust the cooling airflow to 85%.

# PRODUCT SPECIFICATIONS

## ACCESSORIES

### HEAT KIT SELECTION

Model	AEPF1830 1/16	AEPF3036 1/16	AEPF4260 1/16	AEPT030 00C-1A	AEPT036 00C-1A	AEPT060 00C-1A
HKR-05C*	X			X		
HKR-08C*	X	X		X	X	
HKR-10C*	X	X	X	X	X	X
HKR-15C*		X	X		X	X
HKR-20C*			X			X
HKR-21C*			X			X

\* Revision level that may or may not be designated  
C Circuit Breaker

### EXPANSION VALVE KITS FOR AIR CONDITIONING-ONLY APPLICATIONS

Kit Number	Used with	Description
XVB18-36C	AEPF/AEPT 18 to 36	20% bleed valve
XVB42-60C	AEPFAEPT 42 to 60	20% bleed valve
XV18-36C	AEPF/AEPT 18 to 36	Non-bleed valve
XV42-60C	AEPFAEPT 42 to 60	Non-bleed valve

### EXPANSION VALVE KITS FOR AIR CONDITIONING AND HEAT PUMP APPLICATIONS

For R-22 Systems

Valve	Description	Used with Outdoor Units below
TX3N2	Non-bleed valve	3 Ton > Air Conditioner & Heat Pump
TX5N2	Non-bleed valve	3½ Ton < Air Conditioner & Heat Pump

For R-410A Systems

Valve	Description	Cap Used with Outdoor Units below
TX3N4	Non-bleed valve	3 Ton > Air Conditioner & Heat Pump
TX5N4	Non-bleed valve	3½ Ton < Air Conditioner & Heat Pump

### Drain Pan Insulation Kit for Downflow Applications

Chassis Size	Insulation Kit
Small (15½")	DPI18-30/20
Medium (19½")	DPI36-42/20
Large (22")	DPI48-60/20

Note: Each kit contains enough material to modify 20 coils

### Horizontal Drain Pan Insulation Kits

Chassis Size	Insulation Kit
Small (15½")	DPIH18-32
Medium (19½")	DPIH36-42
Large (22")	DPIH48-61

Note: Each kit contains enough material to modify 20 coils

**ACCESSORIES (CONT.)**

**DRAIN PAN INSULATION KIT FOR DOWNFLOW APPLICATIONS**

Chassis Size	Insulation Kit
Small (15½")	DPI18-30/20
Medium (19½")	DPI36-42/20
Large (22")	DPI48-60/20

Note: Each kit contains enough material to modify 20 coils

**HORIZONTAL DRAIN PAN INSULATION KITS**

Chassis Size	Insulation Kit
Small (15½")	DPIH18-32
Medium (19½")	DPIH36-42
Large (22")	DPIH48-61

Note: Each kit contains enough material to modify 20 coils

**FILTERS**

AEPF	Filter #	Qty Required
N/A	FIL 18-32	1
1830	FIL-36-42	1
3036	FIL 48-61	1
4260	FIL 48-61	1



**Air Conditioning & Heating**

*Goodman Manufacturing Company, L.P., reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.*

*Copyright © 2006 • Goodman Manufacturing Company, L.P. • Houston, Texas  
Goodman® brand products are proudly made in the USA.  
Printed in the USA.*