



Air Conditioning & Heating



1½ TO 5 TON

## PRODUCT SPECIFICATIONS

### GSH14 SERIES

14 SEER

SPLIT SYSTEM

HEAT PUMP

COOLING AND HEATING CAPACITIES:  
18,000 BTU/H TO 55,000 BTU/H



The Goodman® GSH14 14 SEER Heat Pump features the high-efficiency Copeland® scroll compressor that provides improved temperature and humidity control throughout the home. The GSH14 has an attractive louvered metal guard to protect the coil from damage and strengthen the unit, while the base pan elevates the unit above the slab for excellent water drainage. A powder-paint finish provides premium durability and improved UV protection.

#### Standard Features

- High-efficiency Copeland® scroll compressor with internal pressure relief valve
- R-22 refrigerant-charged for 15' of refrigerant line
- Liquid refrigerant return protection
- 850 RPM condenser fan motor
- Factory-installed bi-flow liquid line filter dryer
- Low-pressure switch
- Reliable, time-initiated, temperature-terminated defrost control
- Brass liquid and suction line service valves
- Contactor with lug connection
- Ground lug connection
- ARI Certified; ETL Certified

#### Cabinet Features

- Unique Goodman® sound control top design
- Steel louver coil guard
- Heavy-gauge galvanized-steel cabinet
- Attractive Architectural Gray powder-paint finish with 500-hour salt-spray approval
- When properly anchored, meets the 2001 Florida Building Code unit integrity requirements for hurricane-type winds


#### Accessories

- All-fuel kit
- High- and low-pressure switch kit
- Emergency heat relay kit
- Heat Pump shut-off relay; for ACNF Air Handlers
- Outdoor thermostat kit



# PRODUCT SPECIFICATIONS

## NOMENCLATURE

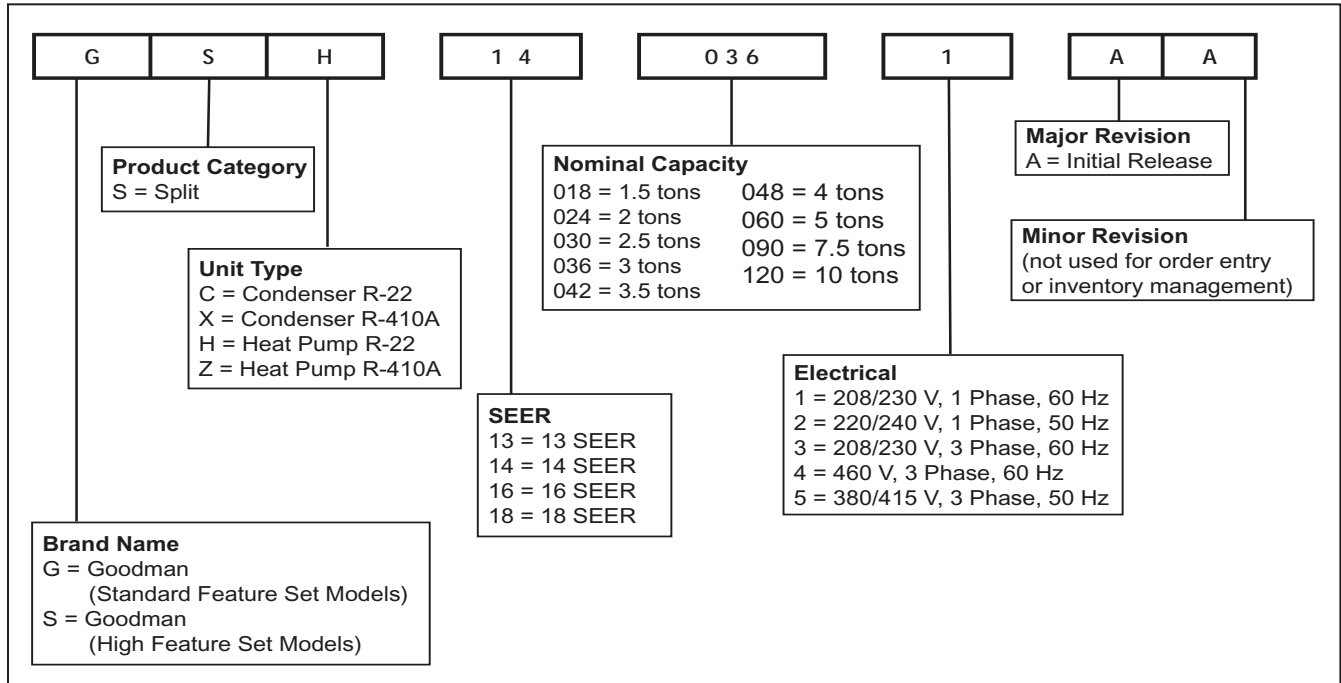

## SPECIFICATIONS


	GSH14 0181A	GSH14 0241A	GSH14 0301A	GSH14 0361A	GSH14 0421A	GSH14 0481A	GSH14 0601A
<b>Capacities and Ratings</b>							
Nominal Cooling (BTU/h)	18,000	24,000	28,000	34,600	39,600	46,000	55,000
Nominal Heating (BTU/h)	18,000	24,000	27,600	34,600	39,600	46,000	55,000
<b>Compressor</b>							
RLA	9	10.9	12.2	13.4	16.0	18.3	19.8
LRA	41.0	54.0	63.0	73.0	88.0	109.0	137.0
<b>Condenser Fan Motor</b>							
Horsepower	$\frac{1}{12}$	$\frac{1}{6}$	$\frac{1}{4}$				
FLA	0.6	1.10	1.50				
<b>Refrigerant Lines</b>							
Liquid Valve Size ("O.D.")*	$\frac{3}{8}$ "						
Suction Valve Size ("O.D.")*	$\frac{3}{4}$ "			$\frac{7}{8}$ "			
Valve Connection Type	Sweat						
Refrigerant Charge	160	160	165	220	220	280	285
Shipped with Orifice Size	TXV						
<b>Electrical Data</b>							
Volts / Hz / Phase	208/230-60-1						
Minimum Circuit Ampacity <sup>1</sup>	11.8	14.7	16.3	18.3	21.5	27.8	27.3
Maximum Overcurrent Device <sup>2</sup>	20	20	20	30	30	40	40
Min / Max Volts	197 / 253						
Electrical Conduit Size	$\frac{1}{2}$ " or $\frac{3}{4}$ "						
Ship Weight (lbs)	199	207	207	242	242	266	280

\* Up to 35' in equivalent line length

- 1) Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes
- 2) May use fuses or HACR type Circuit Breakers of the same size as noted

# PRODUCT SPECIFICATIONS

## DIMENSIONS

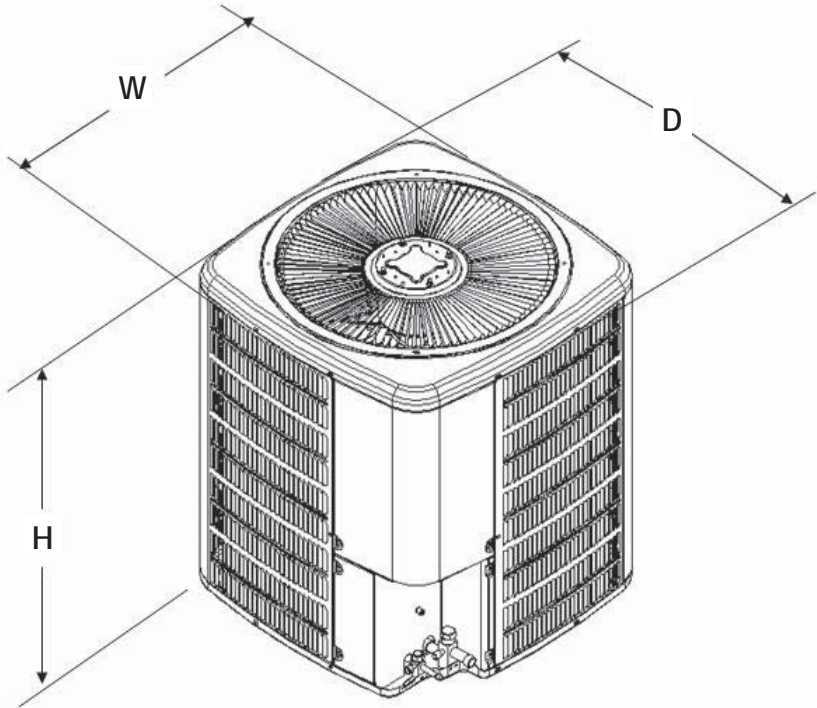

Model	Dimensions W x D x H
GSH140181A	29 x 29 x 34¼
GSH140241A	29 x 29 x 38¼
GSH140301A	29 x 29 x 38¼
GSH140361A	35½ x 35½ x 38¼
GSH140421A	35½ x 35½ x 38¼
GSH140481A	35½ x 35½ x 38¼
GSH140601A	35½ x 35½ x 38¼

PERFORMANCE RATINGS

Model	Indoor Coil Model	Cooling Capacity			Heating Capacity (BTU/h)			ARI #	dBs
		BTU/h	Seer	EER	High Heat	Low Heat	HSPF		
GSH140181A*	AEPF18301A*+TXV	18,000	15.0	12.5	18,000	10,400	8.2	890389	TBD
	AEPT30-00*-1	18,000	15.0	12.5	18,000	10,400	8.2	890457	
	CA*F042*2*+G*V80704B**+TXV	18,000	15.0	12.5	18,000	10,400	8.2	890074	
	CA*F042*2*+G*V950453B**+TXV	18,000	15.0	12.5	18,000	10,400	8.2	890287	
	CA*F042*2*+MBE1200**-1+TXV	18,000	15.0	12.5	18,000	10,400	8.2	890104	
	CA*F042*2*+MBR800**-1+TXV	18,000	14.0	12.0	18,000	10,400	8.2	893640	
	CA*F3131*6A* +MBE1200**-1+TXV	18,000	15.0	12.5	18,000	10,400	8.2	890224	
	CA*F3131*6A*+G*V80704B**+TXV	18,000	15.0	12.5	18,000	10,400	8.2	890132	
	CA*F3131*6A*+G*V950453B**+TXV	18,000	15.0	12.5	18,000	10,400	8.2	890124	
	CA*F3131*6A*+MBR800**-1+TXV	18,000	14.0	12.0	18,000	10,400	8.2	890314	
	CHPF042B2*+G*V80704B**+TXV	18,000	15.0	12.5	18,000	10,400	8.2	890035	
	CHPF042B2*+G*V950453B**+TXV	18,000	15.0	12.5	18,000	10,400	8.2	890128	
	CHPF042B2*+MBR800**-1+TXV	18,000	14.0	12.0	18,000	10,400	8.2	890330	
	CHPF2430B6A*+G*V80704B**+TXV	18,000	15.0	12.5	18,000	10,400	8.2	890236	
	CHPF2430B6A*+G*V950453B**+TXV	18,000	15.0	12.5	18,000	10,400	8.2	890383	
	CHPF2430B6A*+MBR800**-1+TXV	18,000	14.0	12.0	18,000	10,400	8.2	890045	
	CSCF3036N6A*+G*V80704B**+TXV	18,000	15.0	12.5	18,000	10,400	8.2	890350	
	CSCF3036N6A*+G*V950453B**+TXV	18,000	15.0	12.5	18,000	10,400	8.2	890285	
	CSCF3036N6A*+MBR0800**-1+TXV	18,000	14.0	12.0	18,000	10,400	8.2	890112	
	CSCF3036N6A*+MBR800**-1+TXV	18,000	14.0	12.0	18,000	10,400	8.2	890322	
H49F+G*V80704B**+TXV	18,000	15.0	12.5	18,000	10,400	8.2	890049		
H49F+G*V950453B**+TXV	18,000	15.0	12.5	18,000	10,400	8.2	890409		
H49F+MBR0800**-1+TXV	18,000	14.0	12.0	18,000	10,400	8.2	890116		
GSH140241A*	ADPF30421A*+TXV	24,000	14.0	12.0	24,000	15,000	8.2	890339	TBD
	AEPF30361A*+TXV	24,000	15.0	12.5	24,000	15,000	8.2	890134	
	AEPT036-00*-1*	24,000	15.0	12.5	24,000	15,000	8.2	890324	
	CA*F048*2*+G*V80704B**+TXV	23,000	15.0	12.5	23,000	15,000	8.2	890066	
	CA*F048*2*+G*V950453B**	23,600	14.0	12.0	23,600	15,000	8.2	890211	
	CA*F048*2*+MBE1200**-1+TXV	24,000	15.0	12.5	24,000	15,000	8.2	890304	
	CA*F048*2*+MBR0800**-1+TXV	24,000	14.0	12.0	24,000	15,000	8.4	890171	
	CA*F3636*6A*+G*V80704B**+TXV	23,000	15.0	12.5	23,000	15,000	8.2	890241	
	CA*F3636*6A*+G*V950453B**	23,600	14.0	12.0	23,600	15,000	8.2	890335	
	CA*F3636*6A*+MBE1200**-1+TXV	24,000	15.0	12.5	24,000	15,000	8.2	890044	

# PRODUCT SPECIFICATIONS

## PERFORMANCE RATINGS (CONT.)

Model	Indoor Coil Model	Cooling Capacity			Heating Capacity (BTU/h)			ARI #	dBs
		BTU/h	Seer	EER	High Heat	Low Heat	HSPF		
GSH140241A* (cont.)	CA*F3636*6A*+MBR800**-1+TXV	24,000	14.0	12.0	24,000	15,000	8.4	890125	TBD
	CHPF3636*6A*+MBE1200**-1+TXV	24,000	14.0	12.0	24,000	15,000	8.2	890090	
	CHPF3636*6A*+MBR800**-1+TXV	24,000	14.0	12.0	24,000	15,000	8.2	890093	
	CHPF3636B6A*+G*V80704B**+TXV	24,000	14.5	12.2	24,000	15,000	8.4	890398	
	CHPF3636B6A*+G*V950453B**+TXV	24,000	14.5	12.2	24,000	15,000	8.4	890047	
	CSCF3036N6A*+G*V80704B**+TXV	24,000	14.5	12.2	24,000	15,000	8.4	890411	
	CSCF3036N6A*+G*V950453B**+TXV	24,000	14.5	12.2	24,000	15,000	8.4	890267	
	CSCF3036N6A*+MBR800**-1+TXV	24,000	14.5	12.2	24,000	15,000	8.4	890156	
	H49F+G*V80704B**+TXV	24,000	14.5	12.2	24,000	15,000	8.4	890188	
	H49F+G*V950453B**+TXV	24,000	14.5	12.2	24,000	15,000	8.4	890413	
	H49F+MBR0800**-1+TXV	24,000	14.0	12.0	24,000	15,000	8.4	890318	
GSH140301A*	AEPF30361A*+TXV	28,000	15.0	12.5	27,600	16,800	8.4	890394	78
	AEPT036-00*-1*	28,000	15.0	12.5	27,600	16,800	8.4	890431	
	CA*F03642*2*+ MBE1600**-1+TXV	28,000	15.0	12.5	27,600	16,800	8.4	890076	
	CA*F048*2*+MBR1200**-1+TXV	28,000	14.0	12.0	27,600	16,800	8.4	890302	
	CA*F060*2*+ MBE1600**-1+TXV	28,000	15.0	12.5	27,600	16,800	8.4	890110	
	CA*F060*2*+G*V80905C**+TXV	28,000	14.5	12.2	27,600	16,800	8.4	890033	
	CA*F060*2*+G*V81155C**+TXV	28,000	14.5	12.2	27,600	16,800	8.4	890120	
	CA*F3642*6A*+G*V81155C**+TXV	28,000	14.5	12.2	27,600	16,800	8.4	890276	
	CA*F3642*6A*+MBR1200**-1+TXV	28,000	14.0	12.0	27,600	16,800	8.4	890208	
	CA*F43642*6A*+G*V80905C**+TXV	28,000	14.5	12.2	27,600	16,800	8.4	890404	
	CHP0F48*2*+MBE1600**+TXV	28,000	15.0	12.5	27,600	16,800	8.4	890290	
	CHP0F48*2*+MBR1600**+TXV	28,000	14.0	12.0	27,600	16,800	8.4	890058	
	CHP0F48*2*+G*V80905C**+TXV	28,000	14.5	12.2	27,600	16,800	8.4	890447	
	CHP0F48*2*+G*V81155C**+TXV	28,000	14.5	12.2	27,600	16,800	8.4	890146	
	CHP0F48*2*+G*V950704C**+TXV	28,000	14.5	12.2	27,600	16,800	8.4	890191	
	CHPF048*2*+G*V80905C**+TXV	28,000	14.5	12.2	27,600	16,800	8.4	890454	
	CHPF3642*6A*+G*V80905C**+TXV	28,000	14.5	12.2	27,600	16,800	8.4	890180	
	CHPF3642*6A*+G*V81155C**+TXV	28,000	14.5	12.2	27,600	16,800	8.4	890226	
	CHPF3642*6A*+G*V950704C**+TXV	28,000	14.5	12.2	27,600	16,800	8.4	890070	
	CHPF3642*6A*+MBE1600**+TXV	28,000	15.0	12.5	27,600	16,800	8.4	890317	
	CHPF3642*6A*+MBR1600**+TXV	28,000	14.0	12.0	27,600	16,800	8.4	890100	
CSCF3642N6A*+G*V80905C**+TXV	28,000	14.5	12.2	27,600	16,800	8.4	890405		

PERFORMANCE RATINGS (CONT.)

Model	Indoor Coil Model	Cooling Capacity			Heating Capacity (BTU/h)			ARI #	dBs
		BTU/h	Seer	EER	High Heat	Low Heat	HSPF		
GSH140301A* (cont.)	CSCF3642N6A*+G*V81155C**+TXV	28,000	14.5	12.2	27,600	16,800	8.4	890328	78
	CSCF3642N6A*+G*V950704C**+TXV	28,000	14.5	12.2	27,600	16,800	8.4	890079	
	CSCF3642N6A*+MBR1600**+TXV	28,000	14.0	12.0	27,600	16,800	8.4	890195	
	H60F+G*V80905C**+TXV	28,000	14.5	12.2	27,600	16,800	8.4	890342	
	H60F+G*V81155C**+TXV	28,000	14.5	12.2	27,600	16,800	8.4	890367	
	H60F+G*V950704C**+TXV	28,000	14.5	12.2	27,600	16,800	8.4	890216	
	H60F+MBR1600**-1+TXV	28,000	14.0	12.0	27,600	16,800	8.4	890158	
GSH140361A*	AEPF42601A*+TXV	34,600	15.0	12.5	34,600	21,600	8.8	890154	TBD
	AEPT060-00*-1*	34,600	15.0	12.5	34,600	21,600	8.8	890320	
	ARUF37431A*+TXV	34,600	14.0	12.0	34,600	21,600	8.8	890026	
	CA*F061*2*+G*V80905C**+TXV	34,600	14.5	12.2	34,600	21,600	8.8	890038	
	CA*F061*2*+G*V81155C**+TXV	34,600	14.5	12.2	34,600	21,600	8.8	890115	
	CA*F061*2*+G*V90905D**+TXV	34,600	15.0	12.5	34,600	21,600	8.8	890274	
	CA*F061*2*+G*V91155D**+TXV	34,600	15.0	12.5	34,600	21,600	8.8	890283	
	CA*F061*2*+G*V950704C**+TXV	34,600	14.5	12.2	34,600	21,600	8.8	890101	
	CA*F061*2*+G*V950905D**+TXV	34,600	15.0	12.5	34,600	21,600	8.8	890381	
	CA*F061*2*+G*V951155D**+TXV	34,600	15.0	12.5	34,600	21,600	8.8	890165	
	CA*F061*2*+MBE1600**-1+TXV	34,600	14.5	12.2	34,600	21,600	8.8	890402	
	CA*F061*2*+MBE2000**-1+TXV	34,600	15.0	12.5	34,600	21,600	8.8	890196	
	CA*F061*2*+MBR1600**-1+TXV	34,600	14.0	12.0	34,600	21,600	8.8	890298	
	CA*F061*2*+MBR2000**-1+TXV	34,600	14.0	12.0	34,600	21,600	8.8	890040	
	CA*F4860*6A*+G*V80905C**+TXV	34,600	14.5	12.2	34,600	21,600	8.8	890257	
	CA*F4860*6A*+G*V81155C**+TXV	34,600	14.5	12.2	34,600	21,600	8.8	890463	
	CA*F4860*6A*+G*V90905D**+TXV	34,600	15.0	12.5	34,600	21,600	8.8	890054	
	CA*F4860*6A*+G*V91155D**+TXV	34,600	15.0	12.5	34,600	21,600	8.8	890041	
	CA*F4860*6A*+G*V950704C**+TXV	34,600	14.5	12.2	34,600	21,600	8.8	890144	
	CA*F4860*6A*+G*V950905D**+TXV	34,600	15.0	12.5	34,600	21,600	8.8	890440	
	CA*F4860*6A*+G*V951155D**+TXV	34,600	15.0	12.5	34,600	21,600	8.8	890153	
	CA*F4860*6A*+MBE1600**-1+TXV	34,600	14.5	12.2	34,600	21,600	8.8	890437	
	CA*F4860*6A*+MBE2000**-1+TXV	34,600	15.0	12.5	34,600	21,600	8.8	890209	
	CA*F4860*6A*+MBR1600**-1+TXV	34,600	14.0	12.0	34,600	21,600	8.8	890227	
	CA*F4860*6A*+MBR2000**-1+TXV	34,600	14.0	12.0	34,600	21,600	8.8	890346	
	CFS3642N6A*+G*V90905D**+TXV	34,600	14.0	12.0	34,600	21,600	8.8	890309	

# PRODUCT SPECIFICATIONS

## PERFORMANCE RATINGS (CONT.)

Model	Indoor Coil Model	Cooling Capacity			Heating Capacity (BTU/h)			ARI #	dBs
		BTU/h	Seer	EER	High Heat	Low Heat	HSPF		
GSH140361A* (cont.)	CFS3642N6A*+G*V951155D**+TXV	34,600	15.0	12.5	34,600	21,600	8.8	890397	TBD
	CFS3642N6A*+MBR2000+TXV	34,600	14.0	12.0	34,600	21,600	8.8	890239	
	CHPF048*2*+G*V90905D**+TXV	34,600	14.0	12.0	34,600	21,600	8.8	890450	
	CHPF048*2*+MBE2000+TXV	34,600	15.0	12.5	34,600	21,600	8.8	890207	
	CHPF048*2*+MBR2000+TXV	34,600	14.0	12.0	34,600	21,600	8.8	890163	
	CHPF03642*6A+G*V90905D**+TXV	34,600	14.0	12.0	34,600	21,600	8.8	890037	
	CHPF03642*6A+G*V951155D**+TXV	34,600	15.0	12.5	34,600	21,600	8.8	890400	
	CHPF03642*6A+MBE2000+TXV	34,600	15.0	12.5	34,600	21,600	8.8	890109	
	CHPF03642*6A+MBR2000+TXV	34,600	14.0	12.0	34,600	21,600	8.8	890061	
	CHPF48*2*+G*V951155D**+TXV	34,600	15.0	12.5	34,600	21,600	8.8	890277	
	H60F+G*V90905D**+TXV	34,600	14.0	12.0	34,600	21,600	8.8	890275	
	H60F+G*V951155D**+TXV	34,600	15.0	12.5	34,600	21,600	8.8	890167	
	H60F+MBR2000**-1+TXV	34,600	14.0	12.0	34,600	21,600	8.8	890360	
	GSH140421A*	CSCF3642N6A*+MBR2000**-1+TXV	39,500	15.0	12.5	39,500	25,000	9.0	
AEPF42601A*+TXV		39,500	15.0	12.5	39,500	25,000	9.0	890327	
AEPT060-00*-1*		39,500	15.0	12.5	39,500	25,000	9.0	890338	
ARUF37431A*+TXV		39,500	14.0	12.0	39,500	25,000	9.0	890372	
CA*F061*2*+G*V950905D**+TXV		39,500	15.0	12.5	39,500	25,000	9.0	890072	
CA*F061*2*+G*V951155D**+TXV		39,500	15.0	12.5	39,500	25,000	9.0	890250	
CA*F061*2*+MBE2000**-1+TXV		39,500	15.0	12.5	39,500	25,000	9.0	890337	
CA*F061*2*+MBR2000**-1+TXV		39,500	14.0	12.0	39,500	25,000	9.0	890260	
CA*F4860*6A*+G*V950905D**+TXV		39,500	15.0	12.5	39,500	25,000	9.0	890105	
CA*F4860*6A*+G*V951155D**+TXV		39,500	15.0	12.5	39,500	25,000	9.0	890313	
CA*F4860*6A*+MBE2000**-1+TXV		39,500	15.0	12.5	39,500	25,000	9.0	890456	
CA*F4860*6A*+MBR2000**-1+TXV		39,500	14.0	12.0	39,500	25,000	9.0	890434	
CHPF060D2*+G*V951155D**+TXV		39,500	15.0	12.5	39,500	25,000	9.0	890264	
CHPF060D2*+MBR2000**-1+TXV		39,500	14.0	12.0	39,500	25,000	9.0	890347	
CHPF4860*6A*+G*V950905D**+TXV		39,500	15.0	12.5	39,500	25,000	9.0	890117	
CHPF4860*6A*+G*V951155D**+TXV		39,500	15.0	12.5	39,500	25,000	9.0	890280	
CHPF4860*6A*+MBE2000**-1+TXV		39,500	15.0	12.5	39,500	25,000	9.0	890025	
CSCF4860N6A*+GMV950905D** TXV		39,500	15.0	12.5	39,500	25,000	9.0	890199	
CSCF4860N6A*+GMV951155D**+TXV		39,500	15.0	12.5	39,500	25,000	9.0	890262	
H61F+GMV950905D** TXV		39,500	15.0	12.5	39,500	25,000	9.0	890401	
H61F+GMV951155D**+TXV		39,500	15.0	12.5	39,500	25,000	9.0	890157	
H61F+MBR2000**-1+TXV		39,500	15.0	12.5	39,500	25,000	9.0	890349	

PERFORMANCE RATINGS (CONT.)

Model	Indoor Coil Model	Cooling Capacity			Heating Capacity (BTU/h)			ARI Ref #	dBs
		BTU/h	Seer	EER	High Heat	Low Heat	HSPF		
GSH140481A*	ADPF48601A*+TXV	46,000	13.5	11.5	46,000	30,000	8.5	890391	76
	AEPF42601A*+TXV	45,500	15.0	12.5	46,000	30,000	8.8	890136	
	AEPT060-00*-1*	45,500	15.0	12.5	46,000	30,000	8.8	890135	
	ARUF37431A*+TXV	46,000	14.0	12.0	46,000	30,000	8.5	890190	
	CA*F061*2*+G*V91155D**+TXV	46,000	14.5	12.0	46,000	30,000	8.5	890094	
	CA*F061*2*+G*V950905D**	46,000	14.5	12.0	46,000	30,000	8.5	890373	
	CA*F061*2*+G*V950905D**+TXV	46,000	14.5	12.0	46,000	30,000	8.5	890083	
	CA*F061*2*+G*V951155D**+TXV	46,000	14.5	12.0	46,000	30,000	8.5	890057	
	CA*F061*2*+MBE2000**-1+TXV	46,000	15.0	12.5	46,000	30,000	8.8	890426	
	CA*F061*2*+MBR2000**-1+TXV	46,000	14.0	12.0	46,000	30,000	8.5	890223	
	CA*F4860*6A*+G*V91155D**+TXV	46,000	14.5	12.0	46,000	30,000	8.5	890361	
	CA*F4860*6A*+G*V950905D**	46,000	14.5	12.0	46,000	30,000	8.5	890265	
	CA*F4860*6A*+G*V950905D**+TXV	46,000	14.5	12.0	46,000	30,000	8.5	890126	
	CA*F4860*6A*+G*V951155D**+TXV	46,000	14.5	12.0	46,000	30,000	8.5	890201	
	CA*F4860*6A*+MBE2000**-1+TXV	46,000	15.0	12.5	46,000	30,000	8.8	890449	
	CA*F4860*6A*+MBR2000**-1+TXV	46,000	14.0	12.0	46,000	30,000	8.5	890119	
	CHPF060D2*+G*V950905D**	46,000	14.5	12.0	46,000	30,000	8.5	890300	
	CHPF4860D6A*+G*V91155D**+TXV	46,000	14.5	12.0	46,000	30,000	8.5	890230	
	CHPF4860D6A*+MBR2000**-1+TXV	46,000	14.5	12.0	46,000	30,000	8.5	890362	
	CSCF4860N6A*+G*V950905D**+TXV	46,000	14.5	12.0	46,000	30,000	8.5	890133	
	CSCF4860N6A*+G*V951155D**+TXV	46,000	14.5	12.0	46,000	30,000	8.5	890403	
	CSCF4860N6A*+MBR2000**+TXV	46,000	14.5	12.0	46,000	30,000	8.5	890063	
	H61F+G*V950905D**	46,000	14.5	12.0	46,000	30,000	8.8	890189	
	H61F+G*V950905D**+TXV	46,000	14.5	12.0	46,000	30,000	8.5	890323	
H61F+G*V951155D**+TXV	46,000	14.5	12.0	46,000	30,000	8.5	890242		
H61F+MBR2000**-1+TXV	46,000	14.5	12.0	46,000	30,000	8.5	890192		
GSH140601A*	AEPF42601A*+TXV	55,500	14.5	12.0	54,000	33,000	9.0	890374	77
	AEPT060-00*-1*	55,500	14.5	12.0	54,000	33,000	9.0	890240	
	ARPF48601A*+TXV	55,500	13.5	11.5	55,000	33,000	8.5	890395	
	ARPT061-00*-1*+TXV	55,500	13.5	11.5	55,000	33,000	8.5	890406	
	ARUF061-00*-1*+TXV	55,500	13.5	11.5	55,000	33,000	8.5	890148	
	ARUF48601A*+TXV	55,500	13.5	11.5	55,000	33,000	8.5	890388	
	CA*F061*2*+G*V951155D**+TXV	55,500	14.0	11.8	55,000	33,000	8.5	890344	

# PRODUCT SPECIFICATIONS

## PERFORMANCE RATINGS (CONT.)

Model	Indoor Coil Model	Cooling Capacity			Heating Capacity (BTU/h)			ARI #	dBs
		BTU/h	Seer	EER	High Heat	Low Heat	HSPF		
GSH140601A* (cont.)	CA*F061*2*+MBE2000**-1+TXV	55,500	15.0	12.5	54,000	33,000	9.0	890198	77
	CA*F061*2*+MBR2000**-1+TXV	55,500	14.0	11.8	55,000	33,000	8.5	890131	
	CA*F4860*6A*+G*V950905D**+TXV	55,500	14.0	11.8	55,000	33,000	8.5	890042	
	CA*F4860*6A*+G*V95115D**+TXV	55,500	14.0	11.8	55,000	33,000	8.5	890429	
	CA*F4860*6A*+MBE2000**-1+TXV	55,500	15.0	12.5	54,000	33,000	9.0	890336	
	CA*F4860*6A*+MBR2000**-1+TXV	55,500	14.0	11.8	55,000	33,000	8.5	890334	
	CHPF060*2*+MBR2000**-1+TXV	55,500	14.0	11.8	55,000	33,000	8.5	890212	
	CHPF060D2*+G*V950905D**+TXV	55,500	13.5	11.5	54,000	33,000	8.5	890427	
	CHPF060D2*+G*V951155D**+TXV	55,500	13.5	11.5	54,000	33,000	8.5	890073	
	CHPF060D2*+MBR2000**-1+TXV	55,500	15.0	12.5	54,000	33,000	9.0	890379	
	CHPF4860*6A*+MBE2000**-1+TXV	55,500	14.0	11.8	55,000	33,000	8.5	890248	
	CHPF4860D6A*+G*V950905D**+TXV	55,500	13.5	11.5	54,000	33,000	8.5	890270	
	CHPF4860D6A*+G*V951155D**+TXV	55,500	13.5	11.5	54,000	33,000	8.5	890368	
	CHPF486D*6A*+MBE2000**-1+TXV	55,500	15.0	12.5	54,000	33,000	9.0	890219	
	CSCF4860N6A*+G*V90905D**+TXV	55,500	13.5	11.5	54,000	33,000	8.5	890022	
	CSCF4860N6A*+G*V951155D**+TXV	55,500	13.5	11.5	54,000	33,000	8.5	890164	
	CSCF4860N6A*+MBR2000*-1+TXV	55,500	14.0	11.8	54,000	33,000	8.5	890414	
	H61F+G*V90905D**+TXV	55,500	13.5	11.5	54,000	33,000	8.5	890142	
	H61F+G*V951155D**+TXV	55,500	13.5	11.5	54,000	33,000	8.5	890352	
	H61F+MBR2000**-1+TXV	55,500	14.0	11.8	54,000	33,000	8.5	890380	

## ACCESSORIES

Model	Description	GSH14 018	GSH14 024	GSH14 030	GSH14 036	GSH14 042	GSH14 048	GSH14 060
ASC01	Anti-Short Cycle Kit	X	X	X	X	X	X	X
CSR-U-1	Hard-start Kit	X	X	X	X			
CSR-U-2	Hard-start Kit				X	X	X	X
CSR-U-3	Hard-start Kit						X	X
FSK01A <sup>1</sup>	Freeze Protection Kit	X	X	X	X	X	X	X
OT18-60A <sup>2</sup>	Outdoor Thermostat	X	X	X	X	X	X	X
OY/EHR18-60	Emergency Heat Relay Kit	X	X	X	X	X	X	X
TX2N2 <sup>3</sup>	TXV Kit	X						
TX3N2 <sup>3</sup>	TXV Kit		X	X	X			
TX5N2 <sup>3</sup>	TXV Kit					X	X	X

1) Installed on indoor coil

2) Required for heat pump applications where ambient temperatures fall below 0 °F with 50% or higher relative humidity.

3) Field-installed, non-bleed, expansion valve kit



**Air Conditioning & Heating**

*Goodman Manufacturing Company, L.P., reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.*

*Copyright © 2006 • Goodman Manufacturing Company, L.P. • Houston, Texas Goodman® brand products are proudly made in the USA. Printed in the USA.*