

AZAI6WSCDKB - DKN Residential Cloud Wi-Fi Adaptor for Single- and Multi-Zone System

Project Name:	
Location:	_ Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:

### **MODEL COMPATIBILITY:**

Compatible with Single-Zone and Multi-Zone system indoor unit models: CDXS, CTXS, FDXS, FTK, FTXG, FTXR, FTXS, FVXS

The following indoor units do not have the S21 connection and require an additional interface adaptor (ordered separately) to provide the S21 connection:

Indoor Unit Models	Required Interface Adaptor
FTX09NMVJU, FTX12NMVJU, FTK09NMVJU, FTK12NMVJU	KRP067A41E
FTX15NMVJU, FTX18NMVJU, FTX24NMVJU, FTK18NMVJU, FTK24NMVJU	KRP980B2E

### SPECIFICATIONS:

### **PRODUCT IMAGE:**

Model		AZAI6WSCDKB
Description		DKN Residential Cloud Wi-Fi Adaptor for Single- and Multi-Zone System (S21)
Maximum Indoor	Units	1
Total Wiring Leng	gth	8.2ft (2.5m)
Dimensions		3.6 in x 3.15 in x 1.15 in (92mm x 80mm x 29 mm)
Weight		0.28lbs (130 g)
Communication F	Protocol	S21
Storage Tempera	ture	-4°F to 158°F (-20 °C to 70 °C)
Operation Tempe	rature	32°F to 122°F (0 °C to 50 °C)
Operation Humid	ity	5% to 90% (non-condensing)
	Connection	WiFi-Certificated network 802.11b/g/n (802.11n up to 150 Mbps), Bluetooth: v4.2 BR/EDR and BLE specification
Communication	Communication Frequency	2.4GHz
	Max Antenna power	20 dBm
	Sensitivity	-97 dBm
	IP Addressing	Static DHCP
Modbus RS485 c	ommunication baud rate	19200 bps
	Туре	From indoor unit PCB
Power Supply	Voltage	12VDC
. Onc. Oupply	max current	130mA
	max Power	1.56W



Daikin North America LLC, 5151 San Felipe, Suite 500, Houston TX, 77056 www.daikinac.com www.daikincity.com



AZAI6WSCDKB – DKN Residential Cloud Wi-Fi Adaptor for Single- and Multi-Zone System

Project Name:		
Location:	Approval:	
Engineer:	Date:	
Submitted to:	Construction:	
Submitted by:	Unit #:	
Reference:	Drawing #:	

#### **FEATURES:**

- Can use together with the wireless remote controller
- Compatible with Amazon Alexa and Google Home voice control
- Consists of a connection wire to the indoor unit through S21
- Enables the control of indoor units through an iOS or Android smartphone app:
  - o Monitor and/or control the indoor units:
    - On/Off
    - Mode Cool, Heat, Auto, Dry and Fan
    - Room temperature
    - Setpoint
    - Fan speed
    - Louver direction\*
    - Error code
    - Next scheduled event
  - Capable of setting a 7-day schedule for each indoor unit group
  - o Capable of editing unit name and icon, and grouping units
  - Capable of managing users with Basic and Advanced authority
  - Capable of displaying different languages: English, Spanish and French
  - Capable of selecting temperature units °F/°C
- Open API for cloud integration
- Modbus connection for BMS or HAS
  - o The following points are available through Modbus:

No.	Point Name	Read Only/Writable
1	Unit on/off	Writable
2	Setpoint	Writable
3	Room temperature	Read only
4	Mode Auto/Cool/Heat/Fan/Dry	Writable
5	Fan speed	Writable
6	Louver position*	Writable
7	Error code	Read only


<sup>\*</sup> Depends on indoor unit model




AZAI6WSCDKB – DKN Residential Cloud Wi-Fi Adaptor for Single- and Multi-Zone System

Project Name.		
Location:	Approval:	
Engineer:	Date:	
Submitted to:	Construction:	
Submitted by:	Unit #:	
Reference:	Drawing #:	


# **DIMENSIONS:**

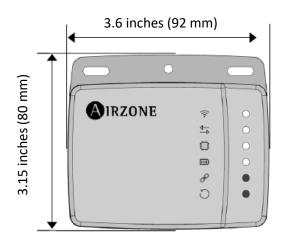

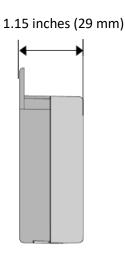



# **MOUNTING:**

The Wi-Fi adaptor shall be mounted onto a flat surface either through screws or double-sided adhesive tape provided with the Wi-Fi adapter.



Screw attachment






Double-sided adhesive attachment



AZAI6WSCDKB – DKN Residential Cloud Wi-Fi Adaptor for Single- and Multi-Zone System

Project Name.		
Location:	Approval:	
Engineer:	Date:	
Submitted to:	Construction:	
Submitted by:	Unit #:	
Reference:	Drawing #:	

#### **WIRING DIAGRAM:**

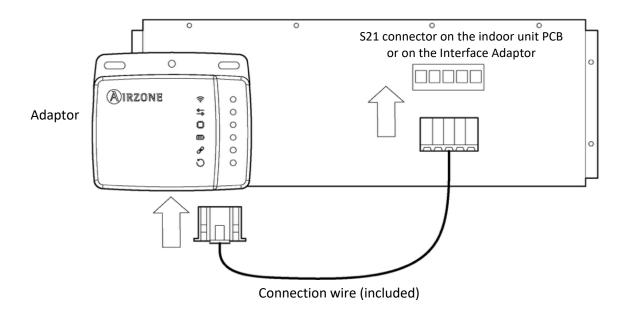

# **DOCUMENTATION:**

Documentation available on www.daikincity.com and/or www.daikinac.com:

- Submittal
- Guide specs
- Product flyer