



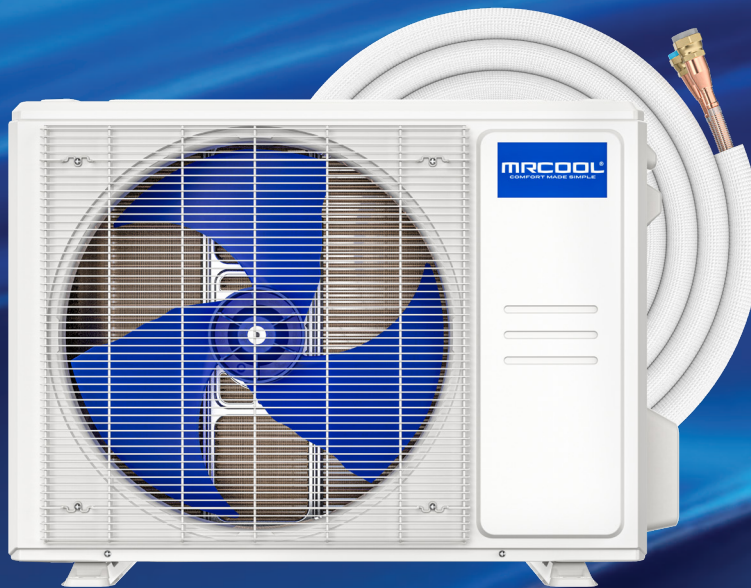

# EASY PRO<sup>®</sup> SERIES

## 5TH GEN DO-IT-YOURSELF MINI-SPLIT

Eligible for  
**MRCOOL<sup>®</sup>**  
**CARE<sup>✓</sup>**  
**PROGRAM**

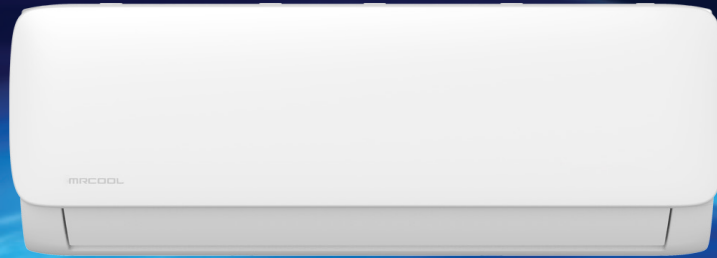

Includes 16 ft installation kit.\*



**SMART HVAC CONTROLLER<sup>®</sup>**

\*The original, registered owner must be enrolled in the MRCOOL<sup>®</sup> Care Program every year in order to qualify for the 2 year full unit replacement for compressor failure and lifetime compressor replacement.

### AFFORDABLE & EFFICIENT COMFORT.



**SCAN HERE**  
for the most up-to-date  
version of this brochure.

V.03.05.2026

[www.mrcool.com](http://www.mrcool.com)



Timer



Leakage Detection



Follow Me®



Gold Fin® Condenser



Smartphone App

**LOW 5°F**

Low Temp Cooling\*



Quiet Running



DC Inverter

| MODEL NO. | Indoor Unit  | EZPRO-09-HP-WMAH-115D-0 | EZPRO-12-HP-WMAH-115D-0 | EZPRO-18-HP-WMAH-230D-0 | EZPRO-24-HP-WMAH-230D-0 |
|-----------|--------------|-------------------------|-------------------------|-------------------------|-------------------------|
|           | Outdoor Unit | EZPRO-09-HP-C-11516D-0  | EZPRO-12-HP-C-11516D-0  | EZPRO-18-HP-C-23016D-0  | EZPRO-24-HP-C-23016D-0  |

**CAPACITY & PERFORMANCE**

|  |       |                |                      |                      |                          |
|--|-------|----------------|----------------------|----------------------|--------------------------|
| Cooling Capacity                       | Btu/h | 9000           | 12000                | 17000                | 24000                    |
| SEER2                                  | Btu/W | 20.2           | 19.5                 | 20.0                 | 18.9                     |
| EER2                                   | Btu/W | 11.3           | 9                    | 9.8                  | 9.7                      |
| Heating Capacity                       | Btu/h | 10000          | 12000                | 18000                | 25000                    |
| HSPF2-4                                | Btu/W | 9.2            | 9.3                  | 8.5                  | 8.7                      |
| HSPF2-5                                | Btu/W | 7.1            | 7                    | 6.6                  | 6.9                      |
| Max Coverage Area*                     | Sq Ft | Up to 400      | Up to 550            | Up to 800            | Up to 1050               |
| Indoor noise level (Turbo/Hi/Mi/Lo/Si) | dB(A) | 43/35/31/22/18 | 44.5/40/35/25.5/17.5 | 46.5/43/36.5/30/18.5 | 51.5/45.5/40.5/26.5/21.5 |
| Outdoor noise level                    | dB(A) | 54             | 54                   | 55                   | 61                       |

\*Max Coverage Area is determined using ideal installation conditions.

**ELECTRICAL PARTS**

|                                  |         |               |               |                   |                   |
|----------------------------------|---------|---------------|---------------|-------------------|-------------------|
| Power Supply                     | Ph-V-Hz | 115V,1Ph,60Hz | 115V,1Ph,60Hz | 208-230V,1Ph,60Hz | 208-230V,1Ph,60Hz |
| Indoor Minimum Circuit Ampacity  | A       | 3.0           | 3.0           | 3.0               | 3.0               |
| Indoor Maximum Fuse (Breaker)*   | A       | 15.0          | 15.0          | 15.0              | 15.0              |
| Outdoor Minimum Circuit Ampacity | A       | 17.0          | 19.5          | 15.0              | 19.0              |
| Outdoor Maximum Fuse (Breaker)*  | A       | 20.0          | 20.0          | 20.0              | 20.0              |

**DIMENSIONS & WEIGHT**

|                           |         |      |                       |                       |                       |                       |
|---------------------------|---------|------|-----------------------|-----------------------|-----------------------|-----------------------|
| Net Dimension (WxDxH)     | Indoor  | inch | 28.70 x 7.87 x 11.50  | 31.57 x 7.87 x 11.61  | 38.23 x 8.98 x 12.64  | 42.60 x 9.21 x 13.27  |
|                           | Outdoor | inch | 28.35 x 10.63 x 19.49 | 28.35 x 10.63 x 19.49 | 30.12 x 11.93 x 21.85 | 35.04 x 13.46 x 26.50 |
| Packing Dimension (WxDxH) | Indoor  | inch | 32.68 x 16.14 x 13.58 | 36.02 x 17.95 x 14.17 | 41.14 x 12.01 x 15.94 | 46.73 x 17.67 x 14.09 |
|                           | Outdoor | inch | 32.87 x 10.63 x 21.26 | 32.87 x 10.63 x 21.26 | 34.92 x 13.27 x 24.02 | 39.17 x 15.67 x 29.13 |
| Net / Gross Weight        | Indoor  | lbs  | 23.81 / 33.95         | 24.91 / 35.71         | 30.64 / 44.97         | 35.49 / 49.60         |
|                           | Outdoor | lbs  | 54.67 / 66.58         | 54.89 / 67.24         | 62.61 / 82.23         | 95.90 / 117.73        |

**REFRIGERANT & PIPING**

|                                  |      |             |             |             |             |
|----------------------------------|------|-------------|-------------|-------------|-------------|
| Refrigerant Type (R-454B)        | oz   | 17.28       | 21.52       | 34.92       | 50.44       |
| Piping Size Liquid Side/Gas Side | inch | 1/4" / 3/8" | 1/4" / 3/8" | 1/4" / 1/2" | 3/8" / 5/8" |

**REBATE SUMMARY**

|                   |  |   |   |   |   |
|-------------------|--|---|---|---|---|
| NEEP              |  | ✓ | ✓ | ✓ | ✓ |
| GHG               |  |   |   | ✓ | ✓ |
| CEE Tier1 - North |  | ✓ | ✓ | ✓ | ✓ |

\*Pat: <https://www.mrcool.com/mrcool-patents/>

All specifications are preliminary and are subject to change during mass production.