



# DIY® Series Multi-Zone

Patented Ductless Mini-Split Heat Pump A/C


ZONE  
**5**

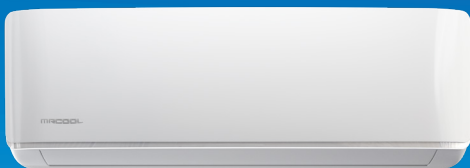


ZONE  
**4**

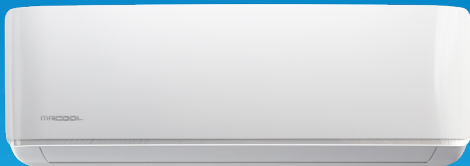


ZONE  
**3**

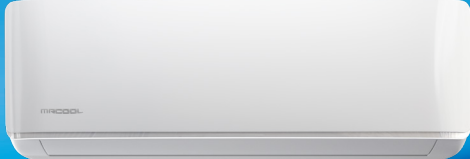

ZONE  
**2**

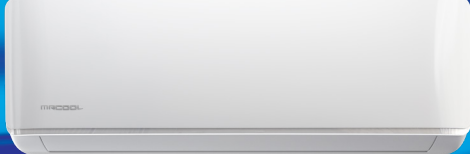

ZONE  
**1**

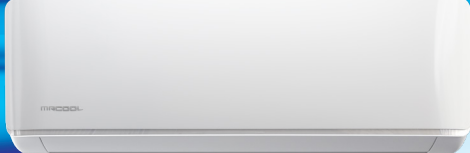

Simple, easy air  
comfort in up to  
**5 zones.**

The MRCOOL® DIY® Multi-Zone  
Series ductless mini-split is the  
only whole-home mini-split  
solution you can install yourself.



JUST ASK  
amazon alexa

works with the  
Google Assistant

**SMART HVAC CONTROLLER®**


- ✓ Easy DIY® Installation
- ✓ Pre-Charged DIY® Quick Connect Line Set
- ✓ Energy Efficient
- ✓ Multi-Room Comfort
- ✓ Gold Fin® Condenser
- ✓ DIY Pro® Cable
- ✓ Eco Safe R-410A Refrigerant
- ✓ Lifetime Technical Support
- ✓ Follow Me® Feature
- ✓ Low Ambient Cooling



# DIY® Quick Connect®


## FACTORY CHARGED LINE SET\*

The patented MRCOOL® DIY® Quick Connect® Line Set\* is 100% accurately pre-charged with R-410A refrigerant. This makes installation quick and easy with no vacuum required.

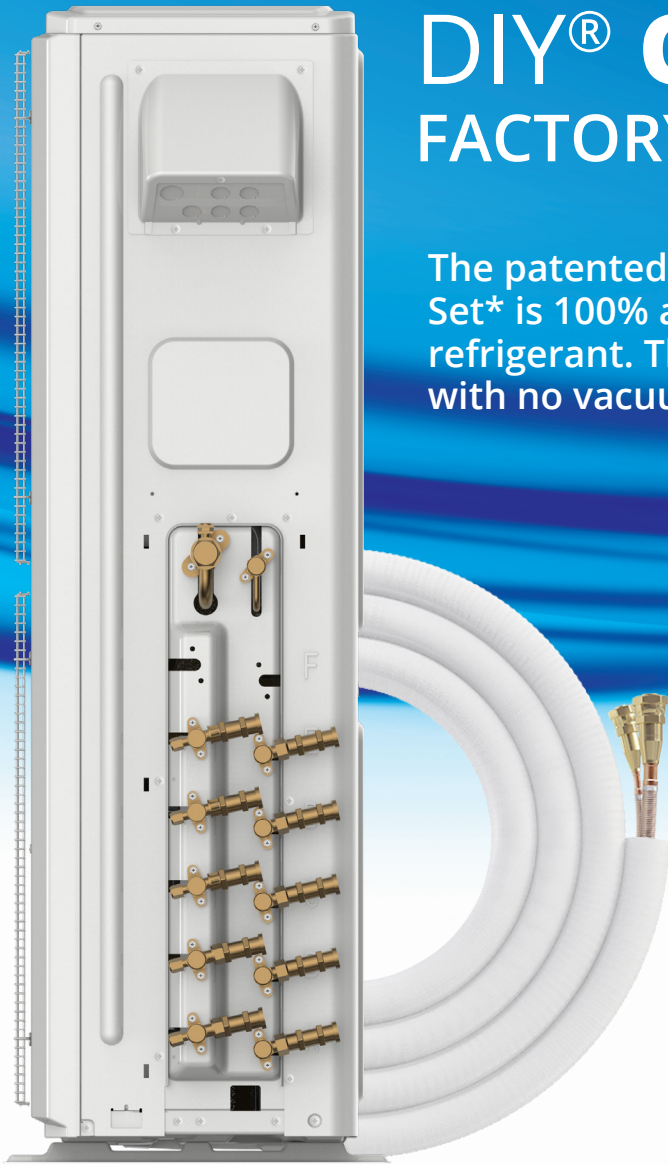

- ✓ Kink Resistant
- ✓ Simple to Use Screw On Quick Connect® Valves
- ✓ Available in 16', 25', 35' & 50' lengths
- ✓ Line sizes 1/4", 1/2" & 3/8", 5/8"
- ✓ Multi-Zone Condenser includes adapter for the 24K Air Handler (3/8", 5/8" Line Size)
- ✓ Leak Proof
- ✓ No Vacuum Needed
- ✓ 100% Accurately Pre-Charged R-410A Refrigerant
- ✓ Create Longer Line Sets With the MRCOOL® DIY® Coupler

The MRCOOL® DIY® Quick Connect® Line Set\* is intended for use with the MRCOOL® DIY® Single or Multi-Zone Units.

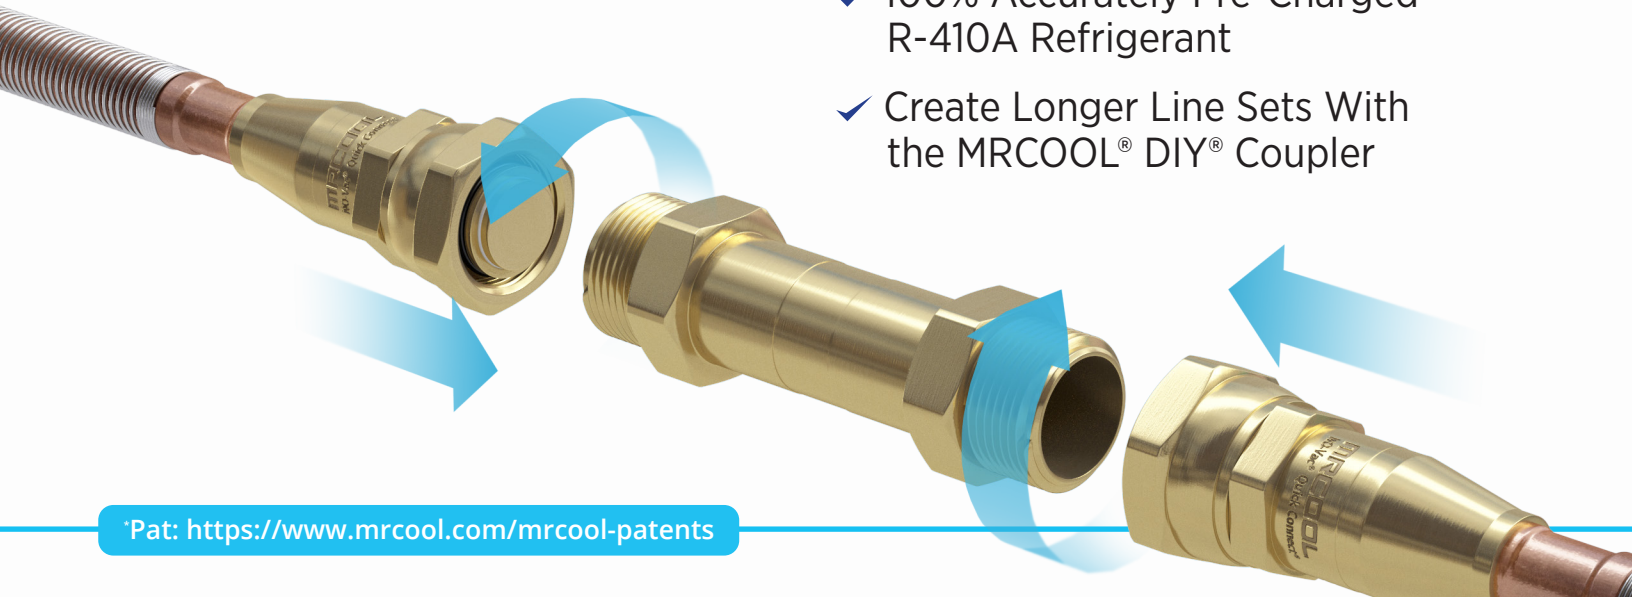



Easy DIY® Installation



Smartphone App



Easy Quick Connect®

Leakage Detection  
(Some units)

DIY Pro™ Cable



Low Ambient Cooling\*



DC Inverter



Gold Fin® Condenser



Follow Me® Function

## SPECIFICATIONS

HEAT PUMP CONDENSER-Outdoor Model		DIY-MULTI2-18HP230C	DIY-MULTI3-27HP230C	DIY-MULTI4-36HP230C	DIY-MULTI5-48HP230C
Maximum Number of Zones	UNIT	2	3	4	5
SEER	Btu/w	21	22	21.5	20.5
Power Supply	V~Hz.ph	208-230~60,1	208-230~60,1	208-230~60,1	208-230~60,1
Minimum Circuit (Disconnect)	A	18.0	26.0	27.0	40.0
Maximum Fuse (Breaker)	A	25.0	40.0	45.0	60.0

### DIMENSIONS & WEIGHT

Net Dimension (WxDxH)	inch	35.04 x 13.46 x 26.50	37.24 x 16.14 x 31.89	37.24 x 16.14 x 31.89	37.48 x 16.34 x 52.48
Packing Dimension (WxDxH)	inch	40.94 x 17.64 x 29.33	42.91 x 19.88 x 35.04	42.91 x 19.88 x 35.04	43.11 x 19.49 x 54.33
Net Weight	lbs	100.53	139.99	170.42	222.89
Gross Weight	lbs	111.11	157.19	187.83	254.41

### REFRIGERANT & PIPING

Refrigerant R-410A	oz	R-410A/65.26	R-410A/91.71	R-410A/134.04	R-410A/162.00
Piping Size Liquid Side/Gas Side	inch	1/4"-3/8"	1/4"-3/8"	*1/4"-3/8"	*1/4"-3/8"

\* If you are using a 24K or greater capacity Air Handler with a 4-zone or 5-zone condenser, you will need to install the included 1/2" line set adapter kit to the outside unit, before the line set can be connected. This requires you to replace both of the connected couplings that are on port A of the outside unit, so the air handler can be connected.

WALL MOUNTED-Indoor Model	Indoor Unit	DIY-09-HP-WMAH-230C25	DIY-12-HP-WMAH-230C25	DIY-18-HP-WMAH-230C25	DIY-24-HP-WMAH-230C25	DIY-36-HP-WMAH-230C25
---------------------------	-------------	-----------------------	-----------------------	-----------------------	-----------------------	-----------------------

### ELECTRICAL PARTS

Power Supply	V~Hz.ph	208-230~60,1	208-230~60,1	208-230~60,1	208-230~60,1	208-230~60,1
Minimum Circuit (Disconnect)	A	3.0	3.0	3.0	3.0	3.0
Maximum Fuse (Breaker)	A	15.0	15.0	15.0	15.0	15.0
Noise Level (Lo/Mi/Hi)	dB(A)	25/35/40	25/35/40	31/37/41.5	33/43.5/48.5	34/45/52

### DIMENSIONS & WEIGHT

Net Dimension (WxDxH)	inch	31.57 x 7.44 x 11.69	31.57 x 7.44 x 11.69	42.52 x 8.90 x 13.19	42.52 x 8.90 x 13.19	49.57 x 11.10 x 14.25
Packing Dimension (WxDxH)	inch	36.02 x 16.34 x 13.98	36.02 x 16.34 x 13.98	49.09 x 19.57 x 16.93	49.09 x 19.57 x 16.93	56.69 x 21.26 x 19.09
Net Weight	lbs	23.8	23.6	34.61	35.27	47.84
Gross Weight	lbs	34.4	34.17	56.00	60.19	78.26



\*If the original owner does not register the unit, the warranty defaults to the standard 5 year parts, 7 year compressor warranty.

\*\*The original, registered owner must be enrolled in the MrCool Care Program every year in order to qualify for the 7 year full unit replacement for compressor failure and lifetime compressor replacement.



## MATCH UPS

## DIY-MULTI2-18HP230C (18K) - 2 COMBINATIONS

## TWO UNITS

9K + 9K

9K + 12K

## DIY-MULTI3-27HP230C (27K) - 7 COMBINATIONS

## TWO UNITS

9K + 12K

9K + 18K

12K + 12K

12K + 18K\*

## THREE UNITS

9K + 9K + 9K

9K + 12K + 12K\*

9K + 9K + 12K\*

## DIY-MULTI4-36HP230C (36K) - 15 COMBINATIONS

## TWO UNITS

9K + 24K

12K + 18K

18K + 18K

12K + 24K

## THREE UNITS

9K + 9K + 9K

9K + 12K + 18K\*

9K + 9K + 24K\*

12K + 12K + 12K

9K + 9K + 12K

9K + 9K + 18K

9K + 12K + 12K

12K + 12K + 18K\*

## FOUR UNITS

9K + 9K + 9K + 9K

9K + 9K + 9K + 12K\*

9K + 9K + 12K + 12K\*

## DIY-MULTI5-48HP230C (48K) - 22 COMBINATIONS

## TWO UNITS

18K + 24K

9K + 36K

18K + 36K\*

24K + 24K

12K + 36K

## THREE UNITS

12K + 12K + 18K

12K + 12K + 24K

9K + 9K + 36K\*

12K + 18K + 18K

18K + 18K + 18K\*

## FOUR UNITS

9K + 9K + 9K + 12K

9K + 9K + 9K + 18K

9K + 9K + 12K + 12K

9K + 9K + 12K + 18K

12K + 12K + 12K + 12K

9K + 12K + 12K + 12K

12K + 12K + 12K + 18K\*

9K + 9K + 18K + 18K\*

9K + 9K + 9K + 24K\*

9K + 9K + 12K + 24K\*

## FIVE UNITS

9K + 9K + 9K + 9K + 9K

9K + 9K + 9K + 9K + 12K

*\*If all indoor units (handlers) run simultaneously, their combined BTU output will not exceed the BTU rating of the outdoor unit (condenser).*



**MRCOOL®**  
COMFORT MADE SIMPLE

48 Remington Way  
Hickory, KY 42051  
270.366.0457

[www.mrcool.com](http://www.mrcool.com)

### 4TH Gen DIY Multizone Performance Specifications

COOLING PERFORMANCE DATA				LEGEND: DB --- Dry Bulb , WB --- Wet Bulb, TC --- Total Net Capacity (1000 Btu/hour), SC --- Sensible Capacity (1000 Btu/hour), Input --- Total Power (kW)																							
Model	Cooling			Operational Testing				Outdoor Conditions (DB)												Standard							
	Indoor			-22°F	-13°F	-4°F	0°F	5°F	17°F	25°F	35°F	47°F	55°F	65°F	75°F	80°F	85°F	95°F	105°F	110°F	115°F	122°F					
	DB	WB		-30°C	-25°C	-20°C	-17.8° C	-15°C	-8.3°C	-3.9°C	1.7°C	8.3°C	12.8°C	18.3°C	24°C	26.7°C	29.4°C	35°C	40.5°C	43.3°C	46°C	50°C					
DIY-09-HP-WMAH-230C25*2 DIY-MULTI2-18HP230C (208-230V)	65°F (18.3° C)	54°F( 12.2° C)	TC SC Input					19.92 13.96 1.44	21.97 15.58 1.67	22.27 16.19 1.67	21.47 15.97 1.71	21.77 16.46 1.75	20.88 16.26 1.71	20.14 15.26 1.74	19.55 15.70 1.70	18.04 13.78 1.65	18.36 14.76 1.86	18.97 15.26 2.08	16.52 14.04 1.88	13.84 12.21 1.61	11.27 10.67 1.45	8.85 8.81 1.28					
	70°F (21.1° C)	59°F (15°C )	TC SC Input					21.08 14.69 1.45	23.25 16.40 1.67	23.32 16.86 1.68	22.69 16.78 1.70	23.14 17.41 1.75	22.12 17.12 1.72	21.24 16.00 1.73	20.58 16.42 1.72	19.13 14.54 1.67	19.49 15.57 1.87	20.09 16.09 2.07	17.21 14.54 1.87	14.70 12.91 1.62	11.97 11.28 1.46	9.32 9.25 1.27					
	75°F (23.9° C)	63°F( 17.2° C)	TC SC Input					22.24 15.41 1.46	24.58 17.24 1.66	24.49 17.61 1.68	23.83 17.51 1.69	24.43 18.29 1.77	23.40 18.02 1.74	22.48 16.83 1.74	21.48 17.04 1.70	20.31 15.34 1.69	20.37 16.16 1.85	21.09 16.80 2.05	18.15 15.25 1.87	15.53 13.54 1.64	12.55 11.76 1.46	9.79 9.67 1.26					
	80°F (26.7° C)	67°F( 19.4° C)	TC SC Input					23.66 16.30 1.49	26.09 18.21 1.67	25.62 18.32 1.68	25.12 18.33 1.69	25.83 19.24 1.76	24.69 18.91 1.75	23.51 17.49 1.73	22.42 17.69 1.70	21.27 15.97 1.68	21.62 17.08 2.00	21.99 17.41 2.04	19.29 16.13 1.87	18.29 14.05 1.63	16.19 12.20 1.44	13.10 10.04 1.25					
	65°F (18.3° C)	54°F( 12.2° C)	TC SC Input					27.06 18.97 2.01	29.30 20.77 2.20	29.11 21.06 2.25	29.30 21.34 2.26	30.89 22.72 2.41	30.71 22.77 2.47	31.28 23.99 2.63	31.45 24.14 2.75	30.89 24.45 2.77	29.41 22.88 3.06	28.00 22.65 3.24	24.00 20.52 3.01	20.05 18.33 2.59	15.73 14.64 2.33	12.12 12.03 2.12					
	70°F (21.1° C)	59°F (15°C )	TC SC Input					28.21 19.68 2.01	30.62 21.58 2.17	30.57 21.99 2.23	31.10 22.55 2.29	32.52 23.79 2.40	32.09 23.68 2.45	32.76 25.00 2.62	32.97 25.15 2.72	32.69 25.75 2.79	31.26 24.18 3.11	29.73 23.90 3.26	25.37 21.59 2.99	20.89 19.00 2.55	16.51 15.27 2.33	12.68 12.54 2.10					
	75°F (23.9° C)	63°F( 17.2° C)	TC SC Input					29.48 20.44 2.01	31.99 22.40 2.16	32.49 23.22 2.24	32.43 23.37 2.27	33.98 24.71 2.40	33.78 24.81 2.45	34.33 26.08 2.61	34.56 26.21 2.71	34.63 27.14 2.82	33.11 25.46 3.10	31.00 24.79 3.22	26.73 22.60 2.96	21.89 19.83 2.55	17.32 15.95 2.32	13.33 13.14 2.09					
	80°F (26.7° C)	67°F( 19.4° C)	TC SC Input					31.26 21.54 2.03	33.50 23.32 2.14	33.91 24.11 2.21	34.32 24.57 2.28	35.39 25.59 2.37	35.60 26.02 2.46	35.80 27.03 2.58	36.00 27.14 2.69	36.23 28.22 2.83	34.60 26.47 3.15	32.94 26.19 3.28	32.94 26.19 3.28	28.44 23.89 2.98	23.04 20.74 2.54	18.21 16.68 2.29	14.03 13.78 2.07				
DIY-09-HP-WMAH-230C25*4 DIY-MULTI4-36HP230C (208-230V)	65°F (18.3° C)	54°F( 12.2° C)	TC SC Input					35.70 24.93 2.79	35.99 26.26 2.96	37.05 27.43 3.05	40.31 29.51 3.40	38.23 28.52 3.42	38.39 29.27 3.52	39.43 30.77 3.57	39.29 30.58 3.63	39.52 30.52 3.68	35.41 28.73 3.75	33.48 26.79 4.25	27.41 22.83 3.61	21.44 18.99 3.02	16.39 15.64 2.46	12.50 12.50 2.11					
	70°F (21.1° C)	59°F (15°C )	TC SC Input					37.38 25.94 2.77	37.53 27.24 2.93	39.28 28.93 3.06	42.74 31.11 3.45	40.20 29.85 3.42	40.62 30.82 3.53	41.12 31.88 3.54	40.97 31.69 3.57	42.00 32.25 3.73	37.67 30.41 3.83	35.17 28.00 4.25	28.79 23.87 3.61	22.66 19.99 3.00	17.30 16.42 2.47	13.25 13.20 2.11					
	75°F (23.9° C)	63°F( 17.2° C)	TC SC Input					39.43 27.22 2.79	39.09 28.24 2.88	41.53 30.42 3.09	44.71 32.35 3.40	42.58 31.44 3.41	42.54 32.06 3.48	42.83 33.02 3.48	43.49 33.49 3.60	44.40 33.87 3.74	40.07 32.17 3.89	37.29 29.53 4.27	30.34 25.03 3.64	23.66 20.75 2.95	18.23 17.21 2.44	13.82 13.71 2.09					
	80°F (26.7° C)	67°F( 19.4° C)	TC SC Input					41.24 28.33 2.80	41.19 29.57 2.87	43.85 31.97 3.10	46.62 33.57 3.34	44.40 32.63 3.36	44.87 33.65 3.45	45.37 34.80 3.53	45.88 35.14 3.62	46.35 35.18 3.71	42.36 33.85 4.11	38.97 30.67 4.27	31.60 25.94 3.58	24.80 21.62 2.93	19.21 18.02 2.47	14.50 14.33 2.07					
	65°F (18.3° C)	54°F( 12.2° C)	TC SC Input					44.66 30.61 3.45	45.72 33.20 3.63	45.72 33.43 3.67	45.18 32.90 3.73	44.85 33.77 3.76	45.93 35.15 4.02	46.79 36.28 4.00	47.74 37.21 4.25	47.79 38.11 4.31	45.15 35.80 4.63	43.12 35.87 4.93	35.60 29.46 4.61	28.86 26.16 4.45	22.90 21.19 4.82	17.39 17.34 4.97					
	70°F (21.1° C)	59°F (15°C )	TC SC Input					47.21 32.18 3.48	48.53 35.08 3.68	47.72 34.67 3.67	47.91 34.69 3.74	47.01 35.21 3.79	48.05 36.59 3.97	48.95 37.73 4.02	49.78 38.58 4.19	50.36 39.96 4.35	47.87 37.78 4.62	45.25 37.42 4.96	37.27 30.68 4.57	30.54 27.54 4.46	24.25 22.34 4.89	18.48 18.35 4.98					
	75°F (23.9° C)	63°F( 17.2° C)	TC SC Input					49.49 33.56 3.49	50.87 36.60 3.67	50.18 36.26 3.63	50.81 36.57 3.74	49.12 36.62 3.75	50.36 38.17 3.96	51.41 39.38 4.03	51.97 40.04 4.18	52.46 41.37 4.32	50.18 41.37 4.57	47.18 39.37 4.94	38.99 31.90 4.59	32.25 28.91 4.47	25.26 23.12 4.79	19.60 19.39 4.97					
	80°F (26.7° C)	67°F( 19.4° C)	TC SC Input					52.53 35.46 3.55	52.99 37.89 3.63	53.04 38.09 3.67	53.09 38.02 3.70	52.20 38.74 3.79	53.07 40.01 3.92	54.01 41.15 4.05	54.93 42.13 4.18	55.81 43.81 4.32	52.94 41.34 4.84	49.83 40.76 4.99	41.26 33.54 4.63	33.66 30.03 4.44	26.79 24.38 4.78	20.52 20.21 4.95					
DIY-09-HP-WMAH-230C25*4 + DIY-12-HP-WMAH-230C25 DIY-MULTI5-48HP230C (208-230V)	65°F (18.3° C)	54°F( 12.2° C)	TC SC Input					44.66 30.61 3.45	45.72 33.20 3.63	45.72 33.43 3.67	45.18 32.90 3.73	44.85 33.77 3.76	45.93 35.15 4.02	46.79 36.28 4.00	47.74 37.21 4.25	47.79 38.11 4.31	45.15 35.80 4.63	43.12 35.87 4.93	35.60 29.46 4.61	28.86 26.16 4.45	22.90 21.19 4.82	17.39 17.34 4.97					
	70°F (21.1° C)	59°F (15°C )	TC SC Input					47.21 32.18 3.48	48.53 35.08 3.68	47.72 34.67 3.67	47.91 34.69 3.74	47.01 35.21 3.79	48.05 36.59 3.97	48.95 37.73 4.02	49.78 38.58 4.19	50.36 39.96 4.35	47.87 37.78 4.62	45.25 37.42 4.96	37.27 30.68 4.57	30.54 27.54 4.46	24.25 22.34 4.89	18.48 18.35 4.98					
	75°F (23.9° C)	63°F( 17.2° C)	TC SC Input					49.49 33.56 3.49	50.87 36.60 3.67	50.18 36.26 3.63	50.81 36.57 3.74	49.12 36.62 3.75	50.36 38.17 3.96	51.41 39.38 4.03	51.97 40.04 4.18	52.46 41.37 4.32	50.18 41.37 4.57	47.18 39.37 4.94	38.99 31.90 4.59	32.25 28.91 4.47	25.26 23.12 4.79	19.60 19.39 4.97					
	80°F (26.7° C)	67°F( 19.4° C)	TC SC Input					52.53 35.46 3.55	52.99 37.89 3.63	53.04 38.09 3.67	53.09 38.02 3.70	52.20 38.74 3.79	53.07 40.01 3.92	54.01 41.15 4.05	54.93 42.13 4.18	55.81 43.81 4.32	52.94 41.34 4.84	49.83 40.76 4.99	41.26 33.54 4.63	33.66 30.03 4.44	26.79 24.38 4.78	20.52 20.21 4.95					

4TH Gen DIY Multizone Performance Specifications																
HEATING PERFORMANCE DATA			LEGEND: DB --- Dry Bulb , WB --- Wet Bulb, TC --- Total Net Capacity (1000 Btu/hour), SC --- Sensible Capacity (1000 Btu/hour), Input --- Total Power (kW)													
Model	Heating		Outdoor conditions (DB)													
	Indoor Conditions DB		-22°F	-13°F	-4°F	0°F	5°F	10°F	17°F	20°F	25°F	32°F	35°F	40°F	47°F	50°F
			-30°C	-25°C	-20°C	-17.8°C	-15°C	-12.2°C	-8.3°C	-6.7°C	-3.9°C	0°C	1.7°C	4.4°C	8.3°C	10°C
DIY-09-HP-WMAH-230C25*2 DIY-MULTI2-18HP230C (208-230V)	60°F (15.6°C)	TC		9.04	11.68	13.61	15.31	15.72	15.85	17.06	18.18	19.34	20.48	21.62	22.68	23.50
		Input		1.68	1.80	1.88	1.96	1.98	1.98	1.98	1.98	1.96	1.93	1.92	1.95	1.88
	65°F (18.3°C)	TC		8.75	11.37	13.24	14.89	15.19	15.45	16.53	17.60	18.74	19.79	21.03	22.08	22.84
		Input		1.73	1.84	1.93	2.00	2.03	2.03	2.03	2.02	2.01	1.98	1.96	1.99	1.93
	70°F (21.1°C)	TC		8.50	11.00	12.84	14.50	14.75	15.00	16.09	17.12	18.17	19.25	20.32	21.52	22.09
		Input		1.78	1.90	1.98	2.04	2.07	2.09	2.09	2.07	2.06	2.03	2.02	2.03	1.98
	75°F (23.9°C)	TC		8.12	10.62	12.27	13.95	14.16	14.42	15.42	16.46	17.52	18.46	19.57	20.66	21.27
		Input		1.83	1.95	2.04	2.11	2.12	2.15	2.14	2.13	2.13	2.10	2.08	2.10	2.04
DIY-09-HP-WMAH-230C25*3 DIY-MULTI3-27HP230C (208-230V)	60°F (15.6°C)	TC		12.19	15.09	18.04	20.11	20.87	21.66	22.40	23.04	23.76	24.82	29.33	34.39	35.40
		Input		2.66	2.39	2.59	2.70	2.76	2.77	2.76	2.69	2.65	2.65	2.80	2.97	2.91
	65°F (18.3°C)	TC		11.80	14.71	17.43	19.54	20.22	20.97	21.64	22.41	23.09	24.03	28.48	33.49	34.21
		Input		2.74	2.44	2.67	2.76	2.83	2.84	2.82	2.76	2.72	2.71	2.88	3.05	2.97
	70°F (21.1°C)	TC		11.50	14.32	16.86	18.94	19.73	20.40	21.11	21.78	22.46	23.22	27.57	32.48	33.21
		Input		2.81	2.51	2.72	2.83	2.89	2.92	2.88	2.84	2.80	2.78	2.96	3.13	3.05
	75°F (23.9°C)	TC		11.01	13.79	16.12	18.14	19.04	19.69	20.25	20.80	21.65	22.33	26.36	31.11	31.78
		Input		2.89	2.57	2.81	2.92	2.96	3.00	2.97	2.91	2.88	2.87	3.04	3.22	3.14
DIY-09-HP-WMAH-230C25*4 DIY-MULTI4-36HP230C (208-230V)	60°F (15.6°C)	TC		16.16	21.33	23.72	26.04	27.99	29.96	31.22	32.46	33.24	34.77	37.28	40.49	41.61
		Input		3.70	3.92	4.01	4.09	4.12	4.11	4.04	4.06	4.01	3.98	3.97	4.01	3.84
	65°F (18.3°C)	TC		15.63	20.73	22.94	25.31	27.28	29.14	30.37	31.52	32.43	33.59	36.30	39.16	40.24
		Input		3.80	4.01	4.11	4.21	4.22	4.21	4.13	4.14	4.10	4.07	4.08	4.10	3.96
	70°F (21.1°C)	TC		15.10	20.20	22.29	24.60	26.46	28.32	29.37	30.51	31.61	32.68	35.42	38.05	39.07
		Input		3.92	4.13	4.24	4.34	4.33	4.29	4.26	4.25	4.21	4.18	4.19	4.19	4.08
	75°F (23.9°C)	TC		14.47	19.33	21.40	23.59	25.38	27.33	28.11	29.23	30.35	31.21	34.18	36.42	37.70
		Input		4.05	4.27	4.38	4.47	4.44	4.40	4.38	4.35	4.32	4.29	4.33	4.33	4.22
DIY-09-HP-WMAH-230C25*4 + DIY-12-HP-WMAH-230C25 DIY-MULTI5-48HP230C (208-230V)	60°F (15.6°C)	TC		20.96	26.60	28.78	31.75	34.22	37.00	37.35	38.55	39.72	40.52	45.82	51.47	53.40
		Input		4.09	4.61	4.59	4.72	4.75	4.86	4.66	4.52	4.43	4.39	4.65	5.00	4.79
	65°F (18.3°C)	TC		20.41	25.95	28.02	30.98	33.12	35.78	36.44	37.50	38.42	39.27	44.40	50.21	51.69
		Input		4.19	4.71	4.72	4.84	4.88	4.96	4.79	4.66	4.56	4.51	4.77	5.11	4.94
	70°F (21.1°C)	TC		19.80	25.10	27.31	29.96	32.07	34.64	35.48	36.34	37.26	38.16	43.02	48.84	50.14
		Input		4.30	4.81	4.84	4.98	5.01	5.07	4.92	4.80	4.69	4.61	4.88	5.23	5.08
	75°F (23.9°C)	TC		19.01	24.14	26.36	28.88	30.82	33.29	33.89	34.88	35.92	36.71	41.34	46.94	48.18
		Input		4.41	4.97	5.00	5.12	5.18	5.24	5.08	4.96	4.83	4.73	5.04	5.38	5.23